



**Probing Solutions.  
Made in Germany.**

EN



# ATT10BNCS

**Wide-Band Attenuator For Use With  
LILCO Terminated Current Transformers**

Datasheet



ATT10BNCS	
<b>Electrical Specifications</b>	
<b>Attenuation ratio</b>	20 dB
<b>Attenuation tolerance</b>	±0.25 dB
<b>Frequency range</b>	DC - 50 MHz
<b>Output impedance</b>	50 Ω ±1 %
<b>Input power, RMS</b>	2.25 W
<b>Maximum Rated Input Peak Voltage, No Measurement Category, not in CAT II, III, IV (*)</b>	
<b>Pollution Degree</b>	2
<b>No Measurement Category</b>	100 V
<b>Mechanical Specifications</b>	
<b>Mechanical size</b>	approx. 97 x 35 x 29 mm
<b>Weight</b>	approx. 300 g


This product comes with 2 years warranty. Specifications that are not marked as guaranteed are typical.

## Description of Functions

The attenuator is connected directly to the BNC interface of a LILCO current transformer, see picture below. The advantages of using an attenuator with a terminated LILCO current transformer include:

- Extended low frequency cut off point in Hz by a factor of 10.
- Reduced droop in %/ms.
- Increased I-t capability in mA's.
- Reduced output in V/A by factor 10.

HF characteristics are preserved.

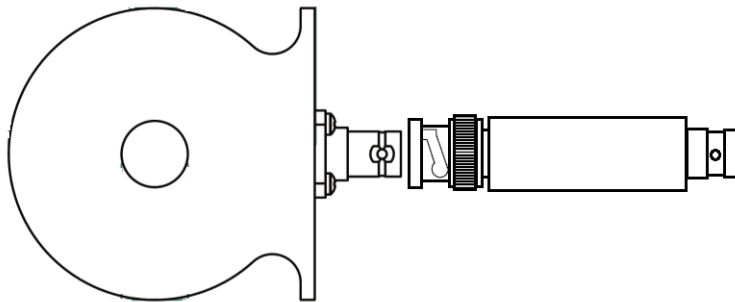

## Operating Instructions

- Connect the unit with the side on label marked with "Current Transformer" to a LILCO Current Transformer.
- Connect your measurement device to the side on label marked with "Oscilloscope".

## About LILCO Current Transformers

PMK LILCO of wide-band terminated current transformers are capable of faithfully reproducing current waveforms over a bandwidth, which extends from the sub-hertz area to greater than 50 MHz. For measurements of pulses up to 25 kA or small currents in the mA range in LF or RF power electronic circuits the PMK current transformers of the LILCO series are ideally suited. Only use insulated cables for the conducting wire, which is placed into the LILCO current transformer.

- 0.04 Hz – 50 MHz bandwidth models.
- Models with peak current capabilities from 500 A to 25 kA.
- Ultra low droop.
- High I-t capability.
- Very high DC saturation currents.
- Integrated 50 Ω termination.
- BNC interface.
- 2 years warranty.



## **Manufacturer**

PMK Mess- und Kommunikationstechnik GmbH  
Koenigsteinerstrasse 98  
65812 Bad Soden am Taunus, Germany

Phone: +49 (0) 6196 5927 - 930  
Fax: +49 (0) 6196 5927 - 939

Internet: [www.pmk.de](http://www.pmk.de)  
E-Mail: [sales@pmk.de](mailto:sales@pmk.de)

**Copyright © 2020 PMK GmbH - All rights reserved.**

Information in this publication supersedes that in all previously published material.  
Specifications are subject to change without notice.